


AXS Ramp

Double



AXS Ramp Double Features:

- M1 (20G) tested.
- Two options for the platform, Open Mesh or Closed Sandwich
- Emergency opening from inside the vehicle
- Light operation by gas spring support.
- Ramp entrance with adapting flaps and rubber edge
- Auto lock for easy operation without additional handling for locking

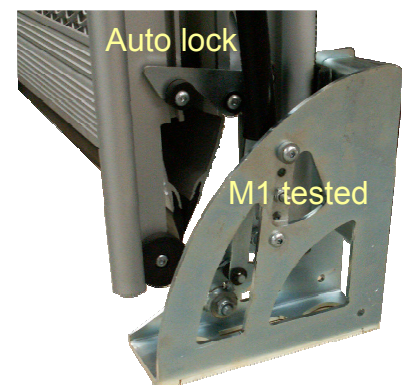

AXS Ramp Double Specifications:

Type	Platform			Floor height @ 25%
	L	W	H	
AR 21-8/2	2100	860	1150	495
AR 25-8/2	2500	860	1350	585
AR 25-10/2	2500	960	1350	585
AR 28-8/2	2800	860	1500	650
AR 28-10/2	2800	960	1500	650

Max Load 350 Kg

