

HANDI FLOOR

M1 Aluminium Floor



Click! Next profile - Click!

Handi Floor

We have developed the Handi Floor with a high degree of flexibility. This allows you to change the layout on the spot.

Handi Floor is very easy to install. When you become good at it, just one person can lay the floor in a few hours – depending on layout and vehicle model.

The profiles are only 25 mm high – the lowest in the market – which ensures a maximum internal roof height in your vehicle. M1 and M2 approved with a wide range of seats from different manufacturers.

The ideal solution for any application where flexibility and/or reliability are key issues. Perfect for M1 and M2 minibuses, ambulances, prisoner transportation vehicles, crew cabins etc. etc.

Only your imagination sets the limit.

Extra deep rails


Extra deep rails prevent dirt from becoming an obstacle for your rearrangement of the seats.

Dirt and gravel often makes it difficult to slide a seat in the rails. But not in the Handi Floor rails.







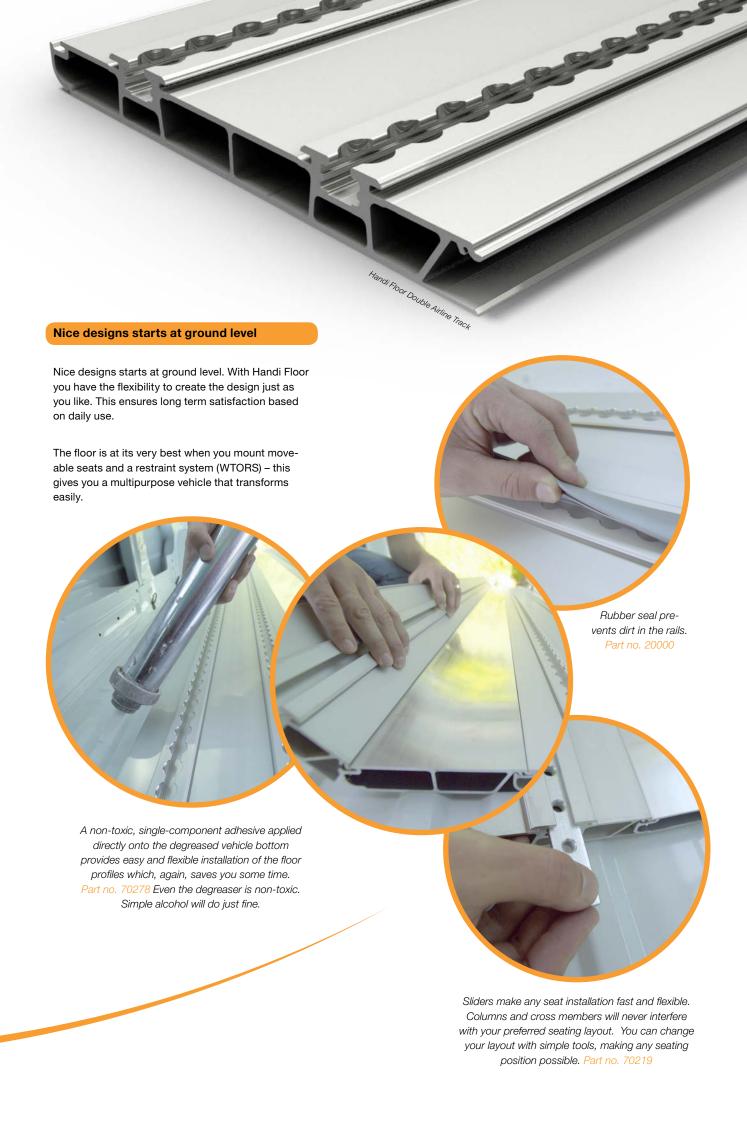


HANDI FLOOR

M1 Aluminium Floor



Technical Specifications

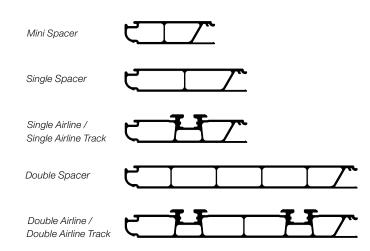

Name	Width		Weigh	Weight per meter	
Mini spacer	mm	86	kg	1,78	
Single spacer	mm	122	kg	2,25	
Single track	mm	122	kg	2,95	
Single Airline Track	mm	122	kg	2,93	
Double spacer	mm	244	kg	4,30	
Double Airline	mm	244	kg	5,60	
Double Airline track	mm	244	kg	5,54	





Volkswagen



Mercedes



Fiat



Opel



Nissan

Crafter, T5

Sprinter, Vito/Viano

Ducato, Scudo

Movano, Vivaro

Interstar, Primastar

((

M1 tested floor according to ECE legislation 76/115/EG -2005/41/EG in 1000 – 4700 mm. length sections.

In-vehicle tested by TÜV Rheinland and UTAC and furthermore approved by DTC and RDW.



Baggeskærvej 48 DK-7400 Herning +45 96 26 96 20 autoproducts@handicare.dk handicare.dk